

**HEALTH & SAFETY COMMENTS**

**CDM REGULATIONS**  
 the client must abide by the construction design and management regulations 2015 which relate to any building works which: (a) lasts longer than 30 working days and has more than 20 workers working simultaneously at any point in the project. or: (b) exceeds 500 person days.


**HEALTH AND SAFETY**  
 the contractor is reminded of their liability to ensure due care, attention and consideration is given in regard to safe practice in compliance with the health and safety at work act 1974.

**MATERIALS AND WORKMANSHIP**  
 all works are to be carried out in a workmanlike manner. all materials and workmanship must comply with regulation 7 of the building regulations, all relevant british standards, european standards, agreement certificates, product certification of schemes (kite marks) etc. products conforming to a european technical standard or harmonised european product should have a ce marking.

**EXISTING STRUCTURE**  
 existing structure including foundations, floor, beams, walls, roof and lintels are to be exposed and checked for adequacy prior to commencement of work and as required by the building control officer.

**DEMOLITION**  
 measures to be put in place during and after the demolition to ensure the protection of the public, public amenities and adjoining properties.  
 such measures to include:  
 - the shoring of adjoining buildings.  
 - the control of dust and noise generation.  
 - the weatherproofing of any parts of adjoining buildings which are left exposed by the demolition.  
 - the repairing and making good any damage to any adjacent building effected by the demolition.  
 - the removal of material or rubbish resulting from the clearance and demolition of the site.  
 - the disconnection, sealing or removal of any drain or sewer, as required.  
 - the making good of any disturbed ground.  
 - any arrangements necessary for the disconnection off all services (e.g. gas, water, electricity).  
 all demolition work to comply with the construction (design and management) regulations 1994 and a health and safety plan is to be provided by the principal contractor.

**SITE INVESTIGATION**  
 a survey of the site is to be carried out by a suitably qualified person including an initial ground investigation, a desk study and a walk over survey. a copy of all reports and surveys to be sent to building control for approval before works commence on site.  
 any asbestos, contaminated soil or lead paint found on the site is to be removed by a specialist. asbestos is to be dealt with in accordance with the control of asbestos regulations 2006.

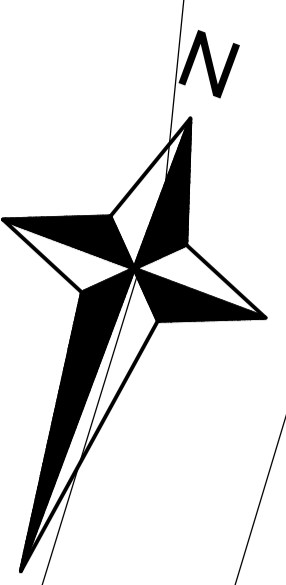

"Blue Badge" Parking spaces

DATE	REV	NOTES
16.01.24	P01	Planning

NOTE: DIMENSIONS ARE NOT TO BE SCALED FROM THIS DRAWING. ALL WRITTEN MEASUREMENTS ARE TO BE CHECKED ON SITE BY THE CONTRACTOR.

© LANCASHIRE COUNTY COUNCIL 2023  
 ALL RIGHTS DESCRIBED IN CHAPTER IV OF THE COPYRIGHT, DESIGN AND PATENTS ACT 1988 HAVE BEEN GENERALLY ASSERTED.

TOWN NAME	Preston		
PREMISES NAME	County Hall Old Building		
PREMISES NO.			
PROJECT	County Hall New lift Installation		
DRAWING TITLE	Existing Site Plan		
SCALE:	DRAWN BY:	DATE:	CHECKED BY:
1:50	@A1 SJH	16.01.24	SO'L

**Lancashire County Council**

**Asset Management Service**

ASSET MANAGEMENT SERVICE,  
 LANCASHIRE COUNTY COUNCIL,  
 PO BOX 100, PR1 0LD. TEL: 0300 1236701

PROJECT NO.	DRAWING NO.	REVISION
9011-LCC-XX-00-	DR-A-40_50_63-0002	S3.P01

DRAWING STATUS: **Planning**

Existing Site plan (1:50)