#### Notes:

The following notes apply to Sheets 1 to 19 drawings ENV000009C-JAC-ZZ-ZZ-DR-L0013 to L0031 and Ribble Sidings drawing ENV000009C-JAC-ZZ-42X-DR-L-0002.

- 1. All existing trees in close proximity to the working area to be protected in accordance with BS 5837:2012 Trees in relation to design, demolition and construction for the duration of the works.
- 2. All measurements given are in metres unless otherwise stated and are approximate. This drawing is to be read in colour.
- 3. The contractor is to verify the presence and location of all underground utilities prior to the commencement of the works and undertaking any excavation works.
- 4. All planting and seeding to be undertaken in accordance with the landscape and ecology specification for the works.
- 5. All arisings other than felled timber as specified are to be removed off site to a licensed tip.
- 6. Refer to the engineer's drawings for the location, design and specification of walls, fencing and gates, all surfaces.

Ground Preparation and Topsoil Reinstatement:

- 7. Extent of reinstatement is indicative and will be subject to final extent of flood defence works and temporary construction land take.
- 8. All disturbed ground to be reinstated and decompacted where necessary. Subsoil treatment to be in accordance with Section Q28 of the landscape specification. And to include all haul routes, site compounds, areas disturbed by construction and all areas to be planted as agreed with the contract administrator. All areas to be decompacted prior to reinstatement of topsoil profiles to match existing profiles and grass seeding. Excluding root protection areas (RPA) below retained trees and hedgerows (RPA drawing no. ENV0000009C-JAC-XX-DR-00-DR-EN-0002 sheet 1 to 8).
- 9. Topsoil profiles to be reinstated with a mix of site-won topsoil sourced from working areas and imported topsoil as necessary to make up the shortfall. Imported topsoil shall comply with BS 3882:2015 General Purpose for all planting and amenity grass seeded areas. Low fertility topsoil to be imported for species-rich grassland areas on the flood embankment areas (remaining species-rich grassland areas to have no topsoil). Imported topsoil shall not contain stones greater than 20mm in size, nor have a total stone content exceeding 10% by mass.
- **Grass Seeding and Sports Pitch Reinstatement**
- 10. Flood embankment and amenity grassland reinstatement areas to have a minimum depth of 100mm topsoil. Species-rich grassland areas to have no topsoil except for flood embankment (as per note 9 above). Amenity grass areas to be reinstated to match existing profiles prior to construction or to comprise 100mm minimum depth of topsoil (whichever is greater). Seedbeds prepared and sown with amenity grassland/species-rich and wildflower mixes as detailed on ENV000009C-JAC-ZZ-42X-DR-L0002, specification and the schedules on this drawing. Areas shown on the drawings are indicative, all disturbed areas are to be reinstated.
- 11. Proposed wetland scrape areas to be located within wildflower mix EM8 to be as shown on drawing ENV0000009C-JAC-ZZ-42X-DR-L002.
- 12. BAC sports pitches ground preparation, drainage, turf and seeding reinstatement to be undertaken by a specialist sport pitch contractor. Sports pitch drainage to tie in with existing. All disturbed areas to be made good.

## Shrub Planting Areas

- 13. Shrub planting plots to have a minimum of 300mm depth topsoil. Subsoil to be decompacted and topsoil cultivated to full depth in accordance with section Q28 of the landscape specification.
- 14. An approved wood chip mulch to be applied around and under shrub planting and hedgerow to a minimum depth of 75mm.

## Tree Planting

15. Refer to the landscape specification Section Q31 for tree pit preparation, planting and staking information.

# Maintenance

16. Five maintenance establishment period. At the end of year one establishment maintenance responsibilities will be as detailed in the Landscape and Habitat and Establishment Plans for the scheme.

(ENV000009C-JAC-ZZ-ZZ-RP-EN-0002 and 0003)

Fishwick Bottoms - Plant Schedules

17. Refer to drawing ENV000009C-JAC-ZZ-ZZ-DR-L0031 for Fishwick Bottom plant schedules.

### OVERALL PLANT SCHEDULES:

Specimen Shrubs								
Species	Abbreviation	Form	Pot vol	Height	Туре	Habit	No. of breaks	Sheet 14
Amelanchier lamarkii	AL	Shrub	15L	175-200cm	CG	Feathered	5	2
Cornus kousa	CK	Shrub	30L	150-175cm	CG	Branched	5	4
							Total	6
Wildflower Plugs (Ribble Sidin	js)							
To be planted a 3/m². All to be 9cm p	olugs, random mix.							
		Area (m²):	5	5	5	5	Total	
Latin name	Common name	%	W1	W2	W3	W4	iotai	
Lythrum salicaria	Purple Loosestrife	20	3	3	3	3	12	
Digitalis purpurea	Foxglove	20	3	3	3	3	12	
Campanula trachium	Nettle Leaved	20	3	3	3	3	12	1
	Bellflower							
Lychnis flos-cuculi	Ragged Robin	20	3	3	3	3	12	
Stachys officinalis	Betony	20	3	3	3	3	12	
	•	Total	15	15	15	15	60	

/C06\

Species-ric	h grassland - Wildflowers fo	or Pond Edges
	Vildflowers for Pond Edges to be se replaced with an additional 0.5	sown with mix EM8 (* EP1F Pepper % Ribwort Plantain)
	•	uk or similar approved. Exact to the commencement of the works.
Sowing Rate:	1.5g/m²	
%	Species	Common name
5	Achillea millefolium	Yarrow
1	Agrimonia eurpatoria	Agrimony
1	Angelica sylvestris	Wild Angelica
10	Centaurea nigra	Common Knapweed
1,5	Chaerophyllum temulum	Rough Chervil
15	Cruciata laevipes	Crosswort
10	Dipsacus fullonum	Wild Teasel
25	Filipendula ulmaria	Meadowsweet
13	Galium album	Hedge Bedstraw
5	Galium verum	Lady's Bedstraw
10	Leucanthemum vulgare	Oxeye Daisy - (Moon Daisy)
1	Lythrum salicaria	Purple Loosestrife
1	Malva moschata	Musk Mallow
1.5	Plantago lanceolata	Ribwort Plantain
1.5	Rumex acetosa	Common Sorrel

Species-ric	h grassland - suitable f	or nutrient-rich areas
Supplier: to b	pe approved.	
Sowing Rate:	4g/m²	
%	Species	Common name
Wildflowers		
1	Achillea millefolium	Yarrow
3	Centaurea nigra	Common Knapweed
1.5	Geranium pratense	Meadow Crane's-bill
3	Leucanthemum vulgare	Oxeye Daisy - (Moon Daisy)
0.5	Lotus corniculatus	Birdsfoot Trefoil
0.5	Plantago lanceolata	Ribwort Plantain
3	Prunella vulgaris	Selfheal
0.5	Rhinanthus minor	Yellow Rattle
1.5	Hypocharis radicata	Cat's Ear
1.5	Lathyrus pratensis	Meadow Vetchling
1	Leontodon autumnalis	Autumn Hawkbit
1.5	Ranunculus acris	Meadow Buttercup
1	Vicia cracca	Tufted Vetch
0.5	Rumex acetosa	Common Sorrel
Grasses		
8	Agrostis capillaris	Common Bent
28	Cynosurus cristatus	Crested Dog's Tail
20	Trifolium pratense	Red Clover
24	Festuca rubra	Slender-creeping Red-fescue


## Heavy standard tree pit detail

- Heavy standard trees shall be minimum 3.0m 3.5m high with a minimum girth of 12-14cm. The trees shall conform to BS 3936 Part 1 and shall have a well defined clear upright central stem of 175 200cm.
- The tree shall be supported by two stakes, each stake shall be whole sections of softwood timber to 75mm top diameter, and peeled. They shall be driven 300mm below the bottom of the pit (or as necessary to secure the tree) and positioned as near to the tree as possible without interfering with the root system. The stakes shall project 700mm above ground level (about a third of the height of the trunk).
- Tree pit detail based on a rootball or containerised tree. Pit 1000x1000x750mm deep. Sides of pit loosened with fork prior to planting. Shape of pit may vary on site depending on site conditions. Variations in gradients and variations in rootball size will require minor modifications to the tree pit as shown.
- Soil level at soil level on stem as previously grown to be marked.

  Plant tree at depth to match this level. Allow for watering hollow.
- **5** Back fill in the top 300mm of the pit to be a mix of 80% topsoil (existing or to BS 3882:2015) and 20% peat free organic planting compost with a pH of 6.5-7.5.

Use of 'Enmag' slow release fertiliser tablets (or similar approved) only to be used on instruction within the backfill. This would be in accordance with manufacturer's recommendations.

- Backfill with site-won subsoil.
- Break up bottom of pit to a depth of 200mm. If base of pit is wet excavate 200mm and replace with drainage layer of clean angular stone. Seek advice, and provide for additional positive drainage if required.
- 75mm thickness ornamental bark mulch shall be applied to a 500mm radius around the tree, apart from the immediate base of the root collar.
- Tree ties shall be used to centrally secure the tree betweens the two stakes.
- Ties to be fixed to the stakes by galvanised clout nails.
- Recycled PVC. photodegradable clear / transparent spiral guards to height of 750mm from base of tree.

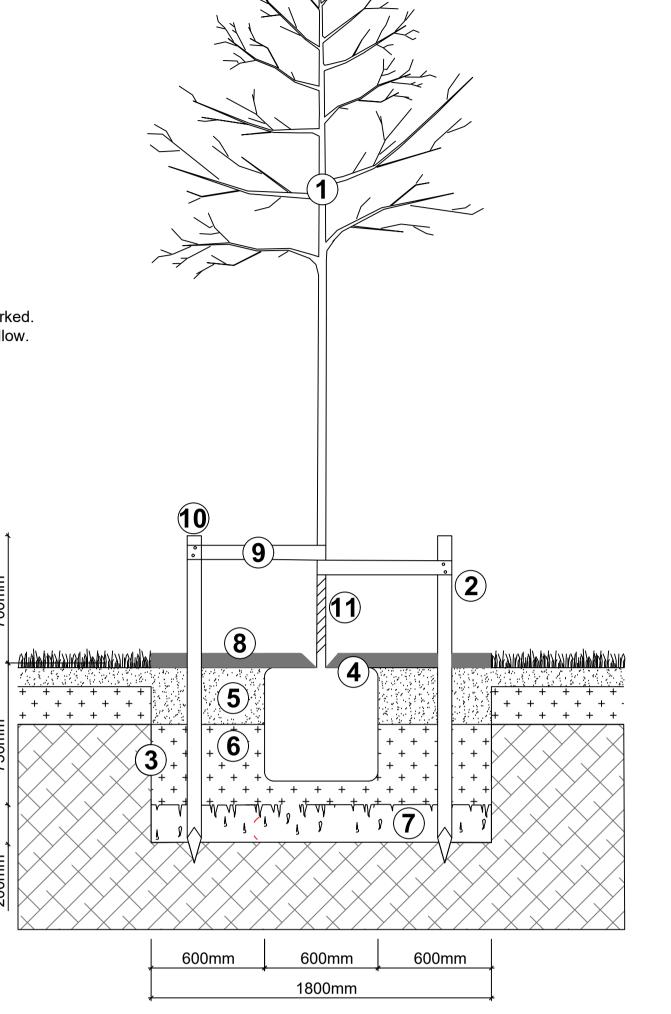

				1				1			1	
Species	Common Name	Form	Girth	Height	Root Condition		Sheet 9	Sheet 12	Sheet 13	Sheet 14	Ribble sidings	Total
Betula pendula	Silver Birch	Heavy standard	12-14cm	3.5-4.25m	Bare root			2	1	3		
Betula pubescens	Downy Birch	Heavy standard	12-14cm	3.5-4.25m	Bare root						3	
Sorbus aucuparia	Rowan	Heavy standard	12-14cm	3.5-4.25m	Bare root					3		
Alnus glutinosa	Alder	Heavy standard	12-14cm	3.5-4.25m	Bare root		8	4	5	5	5	2
Ulmus glabra	Wych Elm	Heavy standard	12-14cm	3.5-4.25m	Bare root			3	6			
Populus tremula	Aspen	Heavy standard	12-14cm	3.5-4.25m	Bare root		6					
Salix caprea	Goat Willow	Standard	8-10cm	2.5-3.0m	Bare root			1	4			
Orchard Trees						·	<u>.</u>					
Species	Common Name	Form	Girth	Size	Root Condition	Rootstock				Sheet 3	Ribble Sidings	Total
Malus domestica 'Cox's Orange Pippin'	Apple (eating)	Standard	8-10cm	2 yr (1.75m)	BR	M25				3	3	
Pyrus communis 'Conference'	Pear	Standard	8-10cm	2 yr (1.75m)	BR	Pyrus communis				3	3	
Prunus domestica 'Victoria'	Plum	Light Standard	6-8cm	1yr	BR	Brompton					3	
Prunus insititia 'Merryweather'	Damson	Half standard	6-8cm	1 yr	BR	Brompton					3	
Prunus avium 'Stella'	Cherry	Standard	8-10cm	2.5-3.0m	BR	Gisela 6					3	

Bulb Planting											
Planted at 30no. Bulbs per m2, random	n / natural layout in	species groups of b	etween 10 and 30.	Area (m²):	60	35	17	13	13	13	
Species and abbreviation	Form	Grade	Minimum	Common	Plot B3.1	Plot B3.2	Plot B3.3	Plot	Plot	Plot	Total
			circumference	name				R1.13	R1.14	R1.15	
Galanthus nivalis	Bulb	4/5cm	4	Snowdrop	600	350	170	150	150	150	1570
Narcissus pseudonarcissus 'lobularis'	Bulb	8/10cm	7	Daffodil	600	350	170	150	150	150	1570
Crocus tommasinianus	Bulb	5cm	topsize	Early Crocus	600	350	170	150	150	150	1570

In parti		ancashi County	re ((		h West ional d &		
	<u> </u>	***	European Region Development Fu				
	*	***	European l		on		
Rev	Rev. Date	Р	urpose of revision	Orig	Check'd	Rev'd	Appr
P01	21.05.2021	FOR EA COM	MENT	AR	KR	KR	MV
C02	29.06.2021	FOR CONSTR	RUCTION	AR	KR	KR	MW
C03	04.10.2021	comments	UCTION, PCC & Rivers Trust	AR	WJ	MJ	JF
C04	20.01.2022	Planning con	nments	AR	JE	JE	JF
C05	28.02.2022	Planning con	nments - Landscape	AR	AM	AM	JF
	11.05.2022	Planning con	nments - Ecology	AR	AM	AM	JF

Preston & South Ribble
Flood Risk Management Scheme

Drawing title LANDSCAPE PROPOSALS

PLANTING PLAN
SHEET 20 of 21
Overall Plant Schedules

= ~~
OT SCALE
Rev
CO

This map is reproduced from Ordnance Survey material with the permission of Ordnance Survey on behalf of Her Majesty's Station Office © Crown copyright. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings.

© Copyright 2022 Jacobs U.K. Limited. The concepts and information contained in this document are the property of Jacobs Use or copyright of this document in whole or in part without the written permission of Jacobs constitutes an infringement of copyright. Limitation: This drawing has been prepared on behalf of, and for the exclusive use of Jacobs' Client, and is subject to, and issued in accordance with, the provisions of the contract between Jacobs and the Client. Jacobs accepts no liability or responsibility whatsoever for, or in respect of, any use of, or reliance upon, this drawing by any third party.